

GROUP OP – P3000 SERIES

PERFORMANCE DATA


Pressures quoted are relief valve maximum by-pass
Performance with SAE 20W oil at 50° C

PUMP TYPE	DISPLACEMENT cc/rev	DELIVERY @1500 RPM & PRESSURE P		MAXIMUM CONTINUOUS PRESSURE P		SPEED AT MAXIMUM CONTINUOUS PRESSURE P	
		MIN lpm	MAX lpm	psi	bar	MAX	MIN
3003	1.27	1.0	1.9	3000	207	4000	700
3004	1.67	1.6	2.5	3000	207	4000	700
3006	2.2	2.3	3.3	3000	207	4000	700
3008	2.87	3.2	4.3	3000	207	4000	700
3011	3.8	4.5	5.7	3000	207	4000	700
3013	4.47	5.5	6.7	3000	207	4000	700
3015	5.13	6.4	7.7	3000	207	4000	700

TYPICAL PERFORMANCE

TYPICAL PUMP DELIVERY

Flow at Max. Pressure.

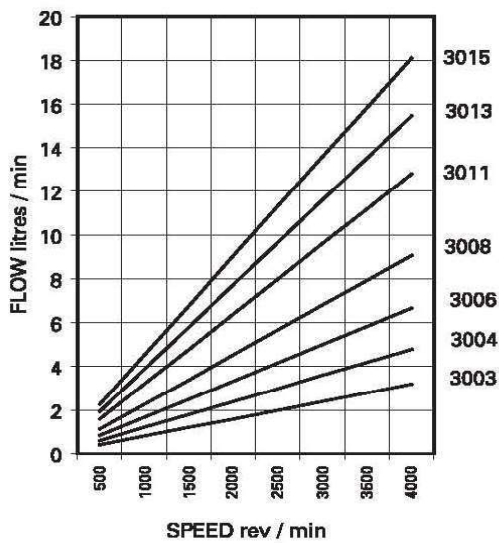

TYPICAL INPUT HORSEPOWER

Fluid SAE 20W
Fluid Temperature 50° C

